

EMS MV5/AV5

Energy management system



Description

EMS is an all-in-one smart meter, gateway, web-server and controller. It is an energy analyser that can monitor one three phase load (or 3 single- phase loads), expandable to 10 three-phase loads via ESY bus add-ons.

EMS is a gateway that supports several communication protocols including Modbus (TCP/IP and RTU), BACnet IP, FTP, FTPS, SFTP, Rest-API and MQTT which allow for rapid integration with third-party software and any other device connected to the network (e.g., building energy management systems and inverters or charging stations).

EMS is a stand-alone controller: with two Ethernet ports, RS485 ports and Wi-Fi communication for a easy and simple programming via smart- phone; energy data readings can be pushed to external servers/Cloud and can be stored in the internal memory of the device.

EMS is a web server: for data analytics presented via dashboards, charts and reports.

By combining accurate metering, a powerful Linux powered CPU in a small case, EMS is really a complete Energy Management System in a box.

Compatible with any 333 mV current transformer and with any current transformer with 5 A secondary current. It can be installed in systems with rated current up to 10 kA, even in retrofit applications if used with openable transformers like CTA or CTD S.

Benefits

- **All- in- one Energy Management System:** fully integrated smart meter, data logger, gateway, web server and controller.
- **High measurement accuracy.**
- **User-friendly installation and set up:** the start- up and each function can be managed and configured by a unique web app (compatible with PC and smart- phones).
- **Real-time data acquisition.**
- **Accurate and reliable 3-phase energy measurement for consumption and feed-in.**
- **Scalability:** it is easy to scale up the system thanks to additional ESY accessories.
- **Interoperability.** By leveraging its automation- server functions, it is easy to exchange data with other systems via FTP, SFTP, FTPS, SMTP, Rest- API, MQTT, Modbus and BACnet.
- **Generic MQTT compatibility:** EMS can send real-time data and data can be stored in the EMS database to a generic MQTT broker. Moreover, EMS has been validated for working with Azure IoT and is compatible with Amazon AWS IoT.
- **Powered by MAIA Cloud:** secure and reliable system for remotely managing, setting and operating EMS units Worldwide.
- **Optimised user interface and data management.** Improved user experience for fast commissioning and easy daily operation thanks to a multi-user system.
- **Over- the- Air (OTA) Updates.** Seamlessly update the firmware of multiple deployed devices remotely via the MAIA Cloud portal, ensuring continuous improvement and maintenance without on-site intervention.
- **Quick configuration.** The configuration wizard that runs when the system is started for the first time allows you to put the unit into operation without errors and in few seconds.
- **Cybersecurity (IoT Security Rating):** Security Capabilities Verified by UL to Level SILVER for EMS (Security Enhancement).
- **Optional Open-EM system:** for allowing third party software modules to be embedded into EMS so to build custom solutions for specific applications.



References

▶ How to order

 **EMS10** 

Enter the code option instead of

| Code | Options | Description |
|--------------------------|------------|----------------------|
| EMS10 | - | - |
| <input type="checkbox"/> | AV5 | 5 A CT connection |
| <input type="checkbox"/> | MV5 | 333 mV CT connection |
| <input type="checkbox"/> | O1 | Digital output |
| <input type="checkbox"/> | S1 | RS485 Modbus RTU |
| <input type="checkbox"/> | X | - |

▶ MAIA Cloud licences

| Information | Description | Document |
|------------------|-------------------------------------|----------------------|
| UWP-LICENCE-M01B | MAIA PLUS LICENCE-12 MONTHS VPN | Licence Code EIM pdf |
| UWP-LICENCE-M02B | MAIA PLUS LICENCE-24 MONTHS VPN | |
| UWP-LICENCE-M04B | MAIA PLUS LICENCE-48 MONTHS VPN | |
| UWP-LICENCE-M05B | MAIA PLUS LICENCE-60 MONTHS VPN | |
| UWP-LICENCE-M25B | MAIA PLUS LICENCE-300 MONTHS VPN | |
| UWP-LICENCE-300C | MAIA PLUS LICENCE 300 CREDITS | |

▶ Accessory modules

| Module code | Connectable CT | Size |
|-------------|----------------|-------|
| ESY3XMV | 3 x 333 mV | 1 DIN |
| ESY3XAV5 | 3 x 5 A | |



▶ Compatible devices

| Device | Instruction manual |
|----------------------|--|
| UWP-MODEM-KIT-4G-E02 | www.gavazziautomation.com/UWP-Modem-Kit-4G-E02.pdf |
| UWP-ROUT-KIT-E01 | www.gavazziautomation.com/UWP-ROUT-KIT-E01_A3.pdf |
| UWP-ROUT-KIT-US | www.gavazziautomation.com/UWP-ROUT-KIT-US_A3.pdf |



Main metering functions

- Measure active, reactive and apparent energy
- Measure the main electrical variables
- Measure the load/analyser run hours
- Measure the total harmonic distortion (THD) of current and voltages
- Multi Load monitoring via plug'n play ESY BUS add-on modules




Main IoT features


- Self power supply via voltage inputs
- Data transmission via Modbus BACnet, MQTT, FTP, SFTP, FTPS, Rest-API
- Embedded Wi-Fi for easy programming/data analysis
- Reliable data storage within the embedded database
- Data analytics organized in dashboards and widgets
- Display analytics based on the stored data via the embedded web server
- Embedded reporting system (scheduled or on-demand reports)
- Secure multi-user access either local (embedded web app) or remote (MAIA Cloud)
- Remote access and firmware update via MAIA Cloud (commissioning and troubleshooting)
- Two Ethernet ports (switch mode for easy cascading of connected devices)
- BTL certified
- IoT certification for Amazon AWS and Microsoft Azure
- Embedded display for diagnostics and variables

Architecture


► Electrical connection

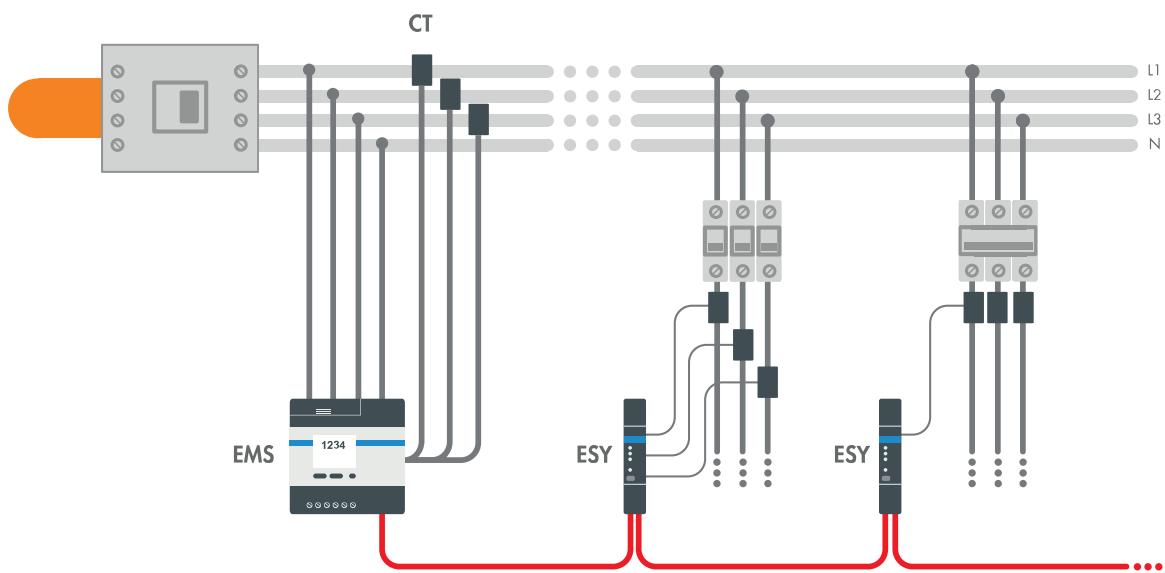

► Connectivity

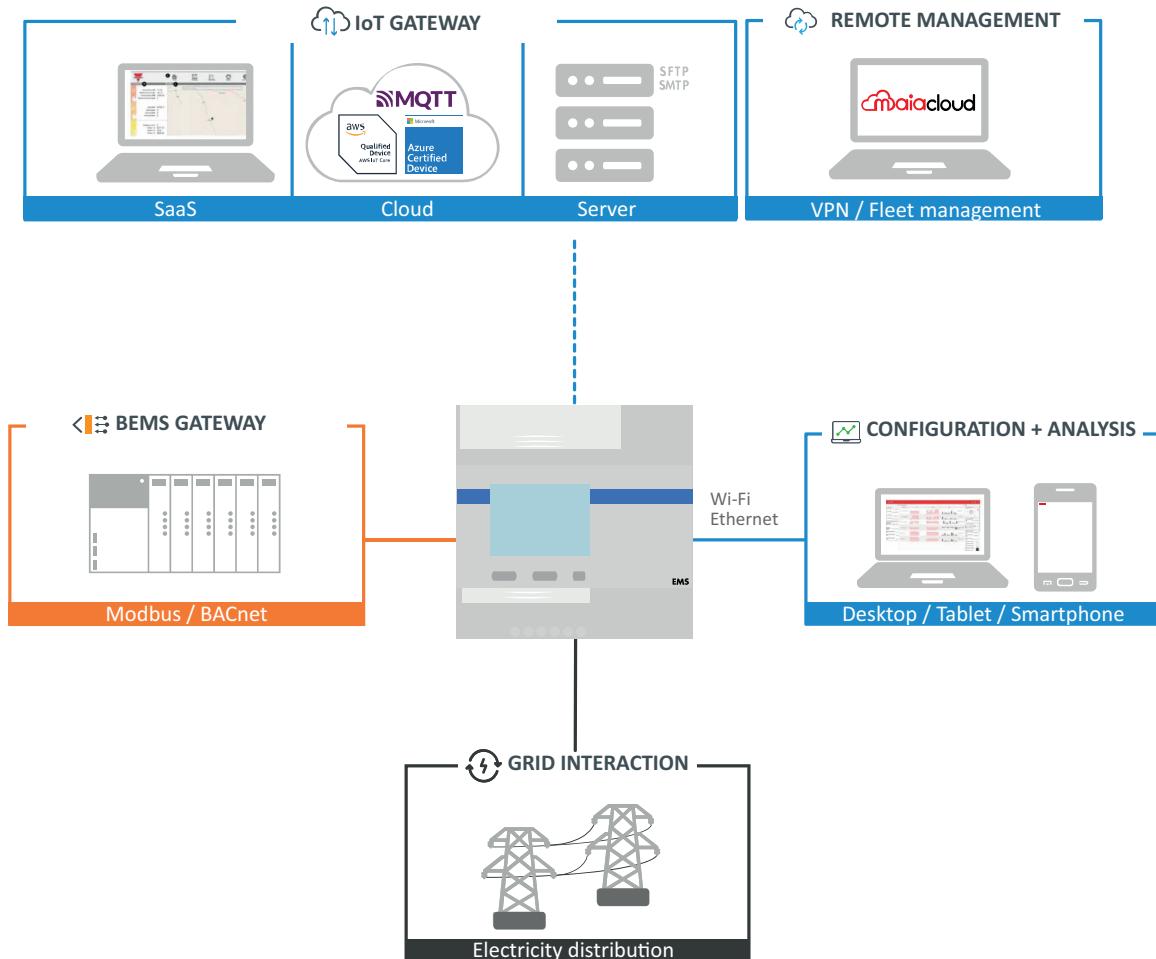

Structure

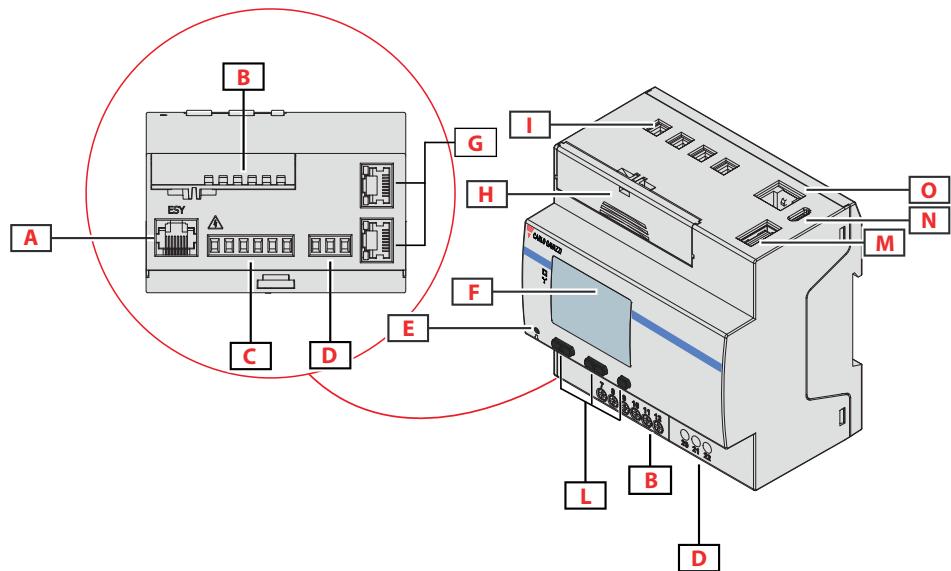


| Area | Description |
|----------|--|
| A | ESY Bus port (RJ45) |
| B | Sliding module (optional digital input and output or RS485 Modbus slave) |
| C | Current transformer terminals |
| D | RS485 Modbus master port |
| E | LED |
| F | Display |
| G | Dual Ethernet ports (internal switch) |
| H | Seal housing |
| I | Voltage inputs |
| L | Browsing and configuration buttons |
| M | USB type A port (4G modem connectivity) |
| N | Micro USB port (Point to point connection) |
| O | P1 port (RJ12) |

Features

General

| | |
|------------------------------|--|
| Material | Housing: PBT Transparent cover: polycarbonate Compliant with UL and CE marks |
| Dimensions | 5-DIN module |
| Weight | Approx. 500 g / 1.10 lb |
| Protection degree | Front: IP40 Screw terminals: IP20 |
| Terminals | <p>AV5/MV5 voltage input (four terminals): Screw type: Combo head Wire size: min. 0.2 mm², max. 2.5 mm² (stranded or solid) Torque: 0.45 Nm max. Sealable, pitch 10 mm</p> <p>AV5/MV5 current input (six terminals): Screw type: Combo head Wire size: min. 0.2 mm², max. 2.5 mm² (stranded or solid) Torque: 0.45 Nm max. Sealable, pitch 5 mm</p> <p>RS485 Modbus Master port: Screw type: Combo head Wire size: min. 0.2 mm², max. 2.5 mm² (stranded or solid) Torque: 0.45 Nm max. Sealable, pitch 5 mm</p> <p>Auxiliary Input/Output (six or four terminals): Screw type: Combo head Wire size: min. 0.2 mm², max. 1.5 mm² (stranded or solid) Torque: 0.4 Nm max. Sealable, pitch 4.6 mm</p> |
| Mounting | DIN rail |
| Oversupply category | III |
| Pollution degree | 2 |
| Protective class | Class II |
| Rated impulse voltage | 4kV |

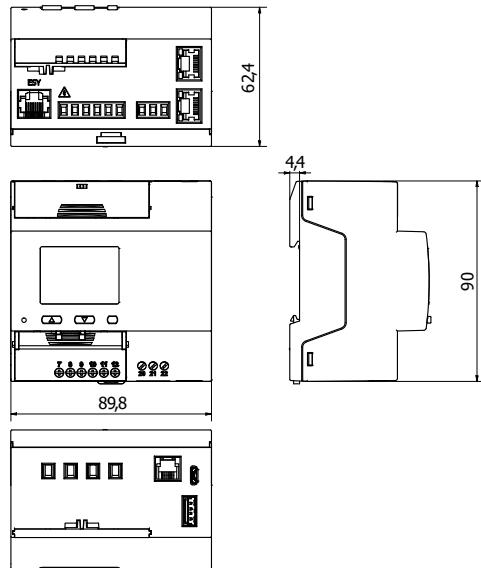

► Environmental

| | |
|------------------------------|--|
| Operating temperature | From -25 to +70 °C / from -13 to +158 °F |
| Storage temperature | From -30 to +70 °C / from -22 to 158 °F |
| Altitude | Max 3000 m / 9842.52 ft |

Note: R.H. < 90 % non-condensing @ 40 °C / 104 °F.

► Power Supply

| | |
|--------------------|-------------------|
| Type | Self power supply |
| Frequency | 50/60 Hz |
| Consumption | 10 W / 15 VA |


 Compatibility and conformity

| | |
|-------------------|--|
| Directives | RED 2014/53/EU RoHS 2011/65/EU |
| Standards | Radio: EN 300 328 V2.2.2 EMC (Electro Magnetic Compatibility): EN 301 489-1 V2.2.3, EN 301 489-17 V3.2.4, EN 62052-11.2021 Safety: EN IEC 61010-1 Health: EN 62311:2020 Metrology: EN IEC 62053-22, EN IEC 62053-23 FCC (USA) Radio Emission: FCC CFR title 47 Part 15C, FCC CFR title 47 Part 2.1091 IC (canadian) radio emission: ISED RSS-247 Issue 3; ISED RSS-102 Issue 5 |
| Approvals |      |

Electrical specifications

| Electrical system | |
|----------------------------------|--|
| Managed electrical system | Single-phase (2-wire) Two-phase (3-wire) Three-phase with neutral (4-wire) Three-phase without neutral (3-wire) Wild-leg system (three-phase, four-wire Delta) |

| Voltage inputs | |
|--|-----------------------------|
| Voltage connection | Direct |
| Rated voltage L-N (from U_n min. to U_n max.) | 120 to 277 V |
| Rated voltage L-L (from U_n min. to U_n max.) | 208 to 480 V |
| Voltage tolerance | From 0.8 to 1.15 U_n |
| Overload | Continuous: 1.15 U_n max. |
| Input impedance | Refer to "Power supply" |
| Frequency | From 45 to 65 Hz |

Note: EMS can be also installed in a wild-leg system (three phases, four-Delta wires), where one of the phase-neutral voltages is higher than the other two.



| Current inputs | AV5 | MV5 |
|-------------------------------|----------------------------------|-------------------------------|
| Current connection | Via CT | Via 333 mV current sensor |
| CT transformation ratio | 2000 max. | - |
| Primary current | 10 kA max. | 10 kA max. |
| Rated current (I_n) input | 5 A | 333 mV |
| Minimum current (I_{min}) | 0.05 A | 0.01 I_n (0.03 V) |
| Maximum current (I_{max}) | 6 A | 1.2 I_n (0.4 V) |
| Start-up current (I_{st}) | 5 mA | 0.001 I_n (0.003 V) |
| Overload | For 500 ms: 20 I_{max} (120 A) | For 500 ms: 8 V |
| Input impedance | < 0.3 VA | 100 kΩ |
| Crest factor | 3 | 1.414 @ I_{max} |
| Measurement type | by means of internal shunts | with external current sensors |

Available measurements

| Active energy | Unit | System | Phase |
|---------------------------------------|------|--------|-------|
| Imported (+) Total | kWh+ | ● | ● |
| Imported (+) partial | kWh+ | ● | - |
| Exported (-) Total | kWh- | ● | ● |
| Exported (-) partial | kWh- | ● | - |
| Imported (+) Total by tariff (t1, t2) | kWh+ | ● | - |
| Quadrant I, II, III, IV | kWh | ● | - |

| Reactive energy | Unit | System | Phase |
|-------------------------|--------|--------|-------|
| Imported (+) Total | kvarh+ | ● | ● |
| Imported (+) partial | kvarh+ | ● | - |
| Exported (-) Total | kvarh- | ● | ● |
| Exported (-) partial | kvarh- | ● | - |
| Quadrant I, II, III, IV | kvarh | ● | - |

| Apparent energy | Unit | System | Phase |
|-------------------------|------|--------|-------|
| Total | kVAh | ● | - |
| Partial | kVAh | ● | - |
| Quadrant I, II, III, IV | kVAh | ● | - |

| Run hour meter | Unit | System | Phase |
|----------------|---------|--------|-------|
| Total (kWh+) | hh:mm | ● | - |
| Partial (kWh+) | hh:mm | ● | - |
| Total (kWh-) | hh:mm - | ● | - |
| Partial (kWh-) | hh:mm - | ● | - |
| Total ON time | hh:mm | ● | - |

| Electrical variable | Unit | System | Phase |
|---------------------|------|--------|-------|
| Voltage L-N | V | ● | ● |
| Voltage L-L | V | ● | ● |
| Current | A | ● | ● |
| Neutral current | A | ● | - |

| Electrical variable | Unit | System | Phase |
|-------------------------|-----------|--------|-------|
| Active power | W | • | • |
| Apparent power | VA | • | • |
| Reactive power | Var | • | • |
| Power factor | PF | • | • |
| Frequency | Hz | • | - |
| THD current* | THD A % | - | • |
| THD voltage L-N* | THD L-N % | - | • |
| THD voltage L-L* | THD L-L % | - | • |

*Up to 31th harmonic

► Measurements

| | |
|---------------|--|
| Method | TRMS measurements of distorted waveforms |
|---------------|--|

► Measurement accuracy

| Current AV5 | |
|--|------------|
| From 0.05 I_n to I_{max} | ± 0.3% rdg |
| From 0.01 I_n to 0.05 I_n | ± 0.6% rdg |

| Current MV5 | |
|--|------------|
| From I_{min} to 0.05 I_n (PF=1) | ± 1% rdg |
| From 0.05 I_n to I_{max} (PF=1) | ± 0.5% rdg |
| From 0.02 I_n to 0.1 I_n (PF=0.5L - 0.8C) | ± 1% rdg |
| From 0.1 I_n to I_{max} (PF=0.5L - 0.8C) | ± 0.6% rdg |

**Phase-phase voltage**

| | |
|--|-----------------|
| From U_n min. -20% to U_n max. +15% | $\pm 0.2\%$ rdg |
|--|-----------------|

Phase-neutral voltage

| | |
|--|-----------------|
| From U_n min. -20% to U_n max. +15% | $\pm 0.2\%$ rdg |
|--|-----------------|

| Active and apparent power | AV5 | MV5 |
|--|----------------------------|--|
| From I_{min} to $0.05 I_n$ (PF=1) | | |
| From $0.05 I_n$ to I_{max} (PF=1) | | $\pm 0.5\%$ rdg |
| From $0.01 I_n$ to $0.05 I_n$ (PF=1) | | $\pm 1\%$ rdg |
| From $0.1 I_n$ to I_{max} (PF=0.5 L - 0.8 C) | | $\pm 0.6\%$ rdg |
| From $0.02 I_n$ to $0.1 I_n$ (PF=0.5 L - 0.8 C) | | $\pm 1\%$ rdg |
| Active energy | Class 0.5S EN IEC 62053-22 | Equivalent to class 0.5S EN IEC 62053-22 |

| Reactive power | AV5 | MV5 |
|---|---------------------------|---|
| From $0.1 I_n$ to I_{max} ($\sin\phi=0.5$ L - 0.5 C) | | |
| From $0.05 I_n$ to I_{max} ($\sin\phi=1$) | | $\pm 2\%$ rdg |
| From $0.05 I_n$ to $0.1 I_n$ ($\sin\phi=0.5$ L - 0.5 C) | | $\pm 2.5\%$ rdg |
| From $0.02 I_n$ to $0.05 I_n$ (PF=1) | | |
| Reactive energy | Class 2 (EN IEC 62053-23) | Equivalent to class 2 (EN IEC 62053-23) |

Frequency

| | |
|-------------------------|-----------------|
| From 45 to 65 Hz | $\pm 0.1\%$ rdg |
|-------------------------|-----------------|

 **Measurement resolution**

| Variable | Display resolution | Resolution by serial communication |
|----------------------------|--------------------|------------------------------------|
| Energy | | 0.001 kWh/kvarh/kVAh |
| Single phase energy | N.A. | 0.001 kWh |
| Power | 0.001 kW/kvar/kVA | 0.1 W/var/VA |
| Current* | 0.001 A | 0.001 A |
| Voltage | | 0.1 V |
| Frequency | N.A. | 0.001 Hz |
| Power factor | 0.01 | 0.001 |

(*)**Note:** value referred to CT ratio =1.

Digital outputs/inputs

Digital inputs

| | |
|---------------------------------|--|
| Connection type | Screw terminals |
| Number of inputs | 1 |
| Type | Free contact |
| Function | Remote status Tariff management Partial meter start/pause Partial meter reset |
| Features | Open contact voltage: 5 V DC +/- 5% Closed contact voltage: 5 mA max Input impedance: 11.6 kΩ Open contact resistance: ≥ 25 kΩ Closed contact resistance: ≤ 840 Ω Maximum voltage applicable with no damages: 30 V AC |
| Configuration parameters | Input function |
| Configuration mode | Via web app |

Digital output

| | |
|----------------------------------|---|
| Connection type | Screw terminals |
| Maximum number of outputs | 1 |
| Type | Opto-mosfet |
| Function | Remote output, alarm |
| Features | V_{ON} 2.5 V AC/DC, max 100 mA V_{OFF} 42 V AC/DC |
| Configuration parameters | Output function (remote/alarm) Output normal status (NO or NC) |
| Configuration mode | Via web app |

Input and output insulation

| Type | ESY port | Measurement inputs | Digital input | Digital outputs | RS485 serial port |
|---------------------------|----------|-----------------------|-----------------------|-----------------------|-----------------------|
| ESY port | - | Basic | - | - | - |
| Measurement inputs | Basic | - | Double/ Reinforced | Double/ Reinforced | Double/ Reinforced |
| Digital input | - | Double/ Reinforced | - | none | none |
| Digital outputs | - | Double/ Reinforced | none | - | - |
| RS485 serial port | - | Double/ Reinforced | none | - | - |

According to EN IEC 61010-1. Overvoltage category III. Pollution degree 2.

Display

| | |
|-------------------------|--|
| Type | Graphical matrix display |
| Refresh time | 500 ms |
| Description | 128 x 96 backlit LCD |
| Variable readout | Instantaneous: 5+1 dgt or 5+3 dgt Energy: 8+3 dgt |

LED

AV5

The LED is Red coloured. Pulse weight: proportional to energy consumption and depending on the CT ratio, 16 Hz maximum frequency.

| Weight (kWh per pulse) | CT ratio |
|------------------------|----------------------|
| 0.001 | ≤ 7 |
| 0.01 | $7 < CT \leq 70$ |
| 0.1 | $70 < CT \leq 700$ |
| 1 | $700 < CT \leq 2000$ |

MV5

The LED is Red coloured. Pulse weight: proportional to energy consumption and depending on Primary current (I_n), 16Hz maximum frequency.

| Weight (kWh per pulse) | Primary current (I_n) |
|------------------------|---------------------------|
| 0.001 | ≤ 35 |
| 0.01 | $35 < I_n \leq 350$ |
| 0.1 | $350 < I_n \leq 3500$ |
| 1 | > 3500 |

Ports

Ethernet

| | |
|--------------------------|---|
| Number of ports | 2 |
| Standard | ISO9847 |
| LAN configuration | Static or DHCP IP Address; Net Mask; Default Gateway, DNS (primary, secondary) |
| Protocols | HTTP, HTTPS, FTP, FTPS, SFTP, Modbus TCP/IP, SMTP, NTP, Azure IoT Hub, AWS IoT, BACnet IP, Rest-API, Multicast DNS (mDNS) |
| Connection type | 2 x RJ45 connector (10 Base-T, 100 Base-TX) Maximum distance: 100 m Integrated switch function to connect another Ethernet device |

RS485

| | |
|---|--|
| Number of ports | 2 |
| Function | 1 Modbus slave port (for S1 versions) and 1 Modbus master port |
| Number of slaves (for the master port) | Up to 12 |
| Connections | 2-wire. Max. distance: 600 m |
| Protocol | Modbus RTU |
| Data format | Selectable: 1 start bit, 7/8 data bit, no/odd/even/ parity, 1/2 stop bit |
| Baud rate | Selectable: from 2400 to 115200 |

HAN port

| | |
|------------------------|--|
| Number of ports | 1 |
| Function | Access real time energy consumption from the smart meter |
| Connection | RJ12, 6P6C |
| Protocol | DSMR 5 |
| Baud rate | Fixed: 115200 |
| Data format | Fixed: data bit 8, no parity , 1 stop bit |



▶ ESY bus

| | |
|--|---|
| Number of ports | 1 |
| Function | Connection with ESY bus accessories |
| Cable type | Min. Cat. 5E, not crossed |
| Cable length | Max. 100 m |
| Bus type | Daisy chain (refer to standard Modbus RTU requirements) |
| Number of ESY extension modules | Max. 10 units |

▶ USB micro bus

| | |
|-----------------|--|
| Type | High-speed USB 2.0 micro-B |
| Mode | Device |
| Speed | 60 MB/s |
| Function | RNDIS (virtual Ethernet) Network access via IP: 192.168.254.254 |

▶ USB type A port


| | |
|------------------------------|--|
| Type | High-speed 2.0 Type-A |
| Mode | Host |
| Communication speed | 60 MB/s |
| Function | Modem communications |
| Supported devices | USB modem/router can be directly connected |
| Supported file system | USB mass storage not supported |




► Wi-Fi

| | |
|--|---|
| Technology | Wi-Fi IEEE 802.11 b/g/n 20/40 MHz |
| Centre frequency range of operating channel | 2412 - 2472 MHz |
| Maximum EIRP output power | 18.34 dBm |
| Number of channels | 13 |
| Channel bandwidth | 20MHz, 40MHz |
| Modulations | DSSS, OFDM |
| Number of Tx antennas | 1 |
| Installation category | Mobile |
| Connectivity | 2.4 GHz Spectrum Capabilities Wi-Fi CERTIFIED™ b Wi-Fi CERTIFIED™ g Wi-Fi CERTIFIED™ n |
| Optimization | WMM® |
| Security | Protected Management frames for SoftAP mode: WPA2™-Personal 2021-01 Protected Management frames Station mode: WPA2™-Enterprise 2018-04 WPA2™-Personal 2021-01 WPA3™-Enterprise 2020-02 WPA3™-Personal 2020-02 WPA™-Enterprise WPA™-Personal |
| Modes | SoftAP Station |


Connection Diagrams

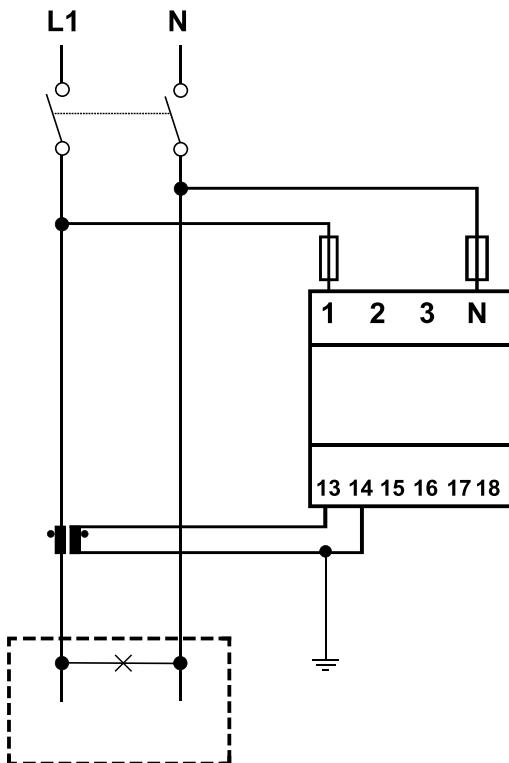


Single-phase system

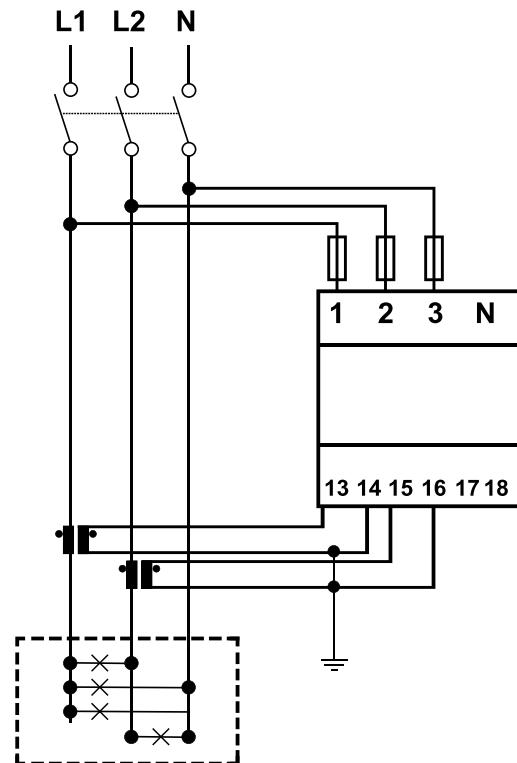


Bi-phase system

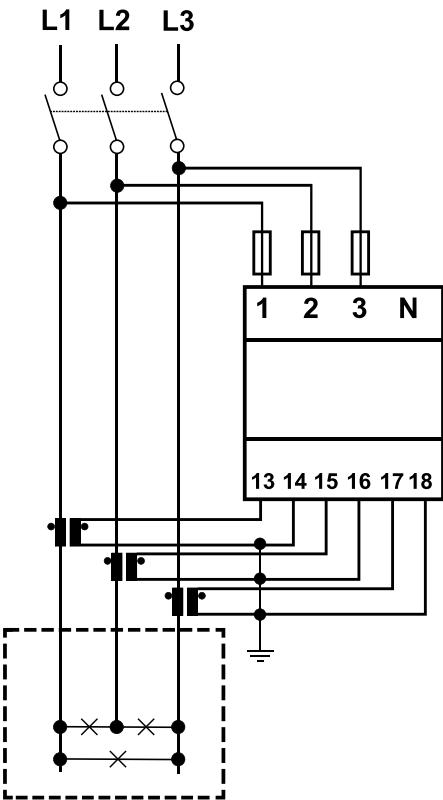


Three-phase without neutral (3-wire)

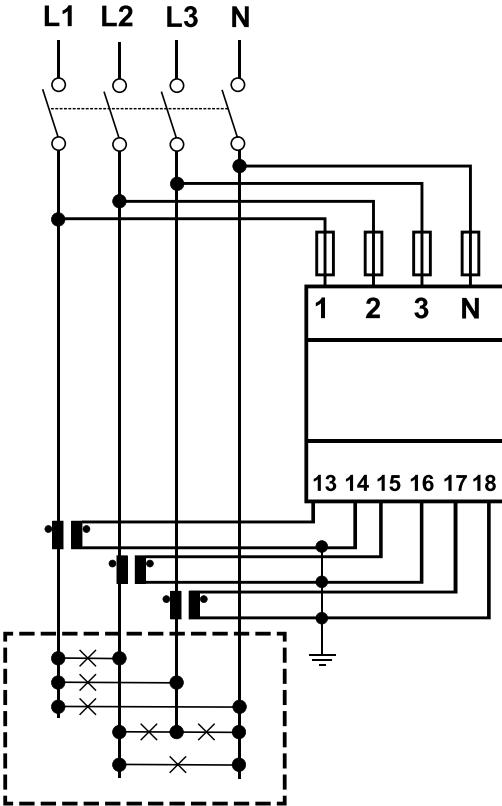


Three-phase with neutral (4-wire).

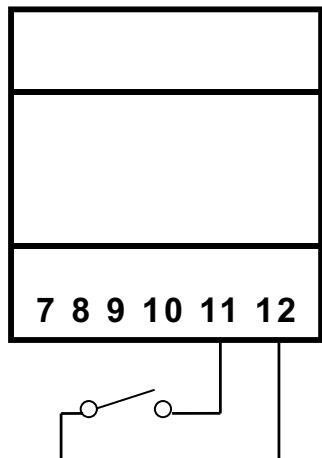Communication

Digital_Input

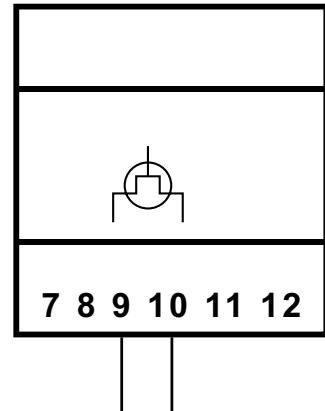

Digital_Output

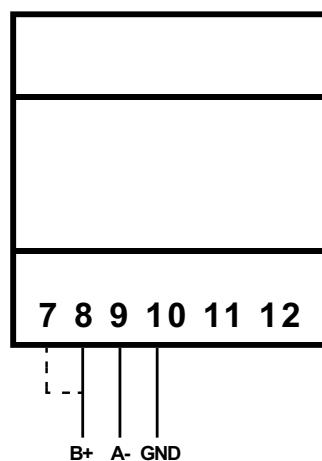

Last device on Modbus RS485

Cybersecurity

▶ Introduction

Cybersecurity is the practice of protecting systems, networks, and programs from digital attacks. These cyberattacks are usually aimed at:

- accessing, changing, or destroying sensitive information;
- extorting money from users;
- interrupting normal business processes.

Implementing effective cybersecurity measures is particularly challenging today because there are more devices than people, and attackers are becoming more innovative.

For EMS MV5/AV5, the security capabilities have been verified by UL to Level SILVER.

The SILVER rating certifies the enhanced security capabilities of EMS MV5/AV5 regarding:

- Access Control
- Industry Privacy Best Practices
- Product Security Maintenance.



Fig. 1 UL Verified Level



Fig. 2 IoT Security Rating Levels Guide

▶ Pillars

- Secure boot.
- Easy upgrade function. Web app notifies users about the availability of a new software and firmware version; the whole upgrade process is managed by the EMS MV5/AV5.
- Fleet management: One-click over-the-air (OTA) update of multiple devices simultaneously.
- Secure access: thanks to MAIA Cloud, you can access a EMS MV5/AV5 system through a secure VPN (virtual private network).
- Minimalist approach: EMS MV5/AV5 has been designed to include only the necessary sub-systems into a highly optimized linux core, so to avoid unnecessary risks due to attacks to unmonitored services.

Network service ports

Inbound communication

| Port | Protocol | Service | Configurable | Default service |
|-------|----------|----------------|--------------|-----------------|
| *80 | TCP | HTTP | NO | Enable |
| 443 | TCP | HTTPS | NO | Enable |
| 52325 | TCP | SSH | NO | Enable |
| 5353 | UDP | mDNS | NO | Enable |
| 67 | UDP | DHCP server | NO | Enable |
| 47808 | UDP | BACnet gateway | YES | Disable |
| 502 | TCP | Modbus gateway | YES | Disable |

*Note: this port is redirected to 443

Outbound communication

| Port | Protocol | Service | Configurable | Default service |
|------|----------|------------------|--------------|-----------------|
| 443 | TCP | MAIA Cloud | NO | Enable |
| 1194 | UDP | MAIA Cloud (VPN) | NO | Enable |
| 21 | TCP | FTP | YES | Disable |
| 22 | TCP | SFTP | YES | Disable |
| 990 | TCP | FTPS | YES | Disable |
| 53 | UDP | DNS | NO | Enable |
| 123 | UDP | NTP | NO | Disable |
| 25 | TCP | SMTP | YES | Disable |
| 587 | TCP | SMTPS | YES | Disable |
| 8883 | TCP | MQTT | YES | Disable |
| 8883 | TCP | MQTTS | YES | Disable |



COPYRIGHT ©2025

Content subject to change. Download the updated version:

www.gavazziautomation.com