

MIRO 12.4 110V-2U-FK OUTPUT RELAY

IN: 110 VAC/DC - OUT: 250 VAC/DC / 6 A

Art.No.: 6652130

Weight: 0.046

Country of origin: CZ

Model designation: MIRO12,4-1AUSG.REL.110V-2U-FK

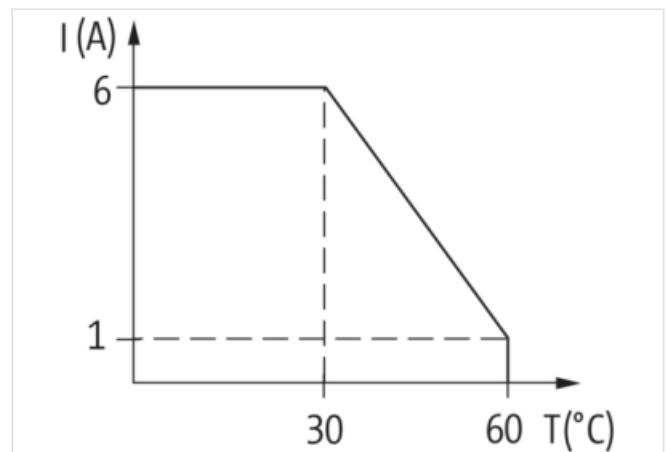
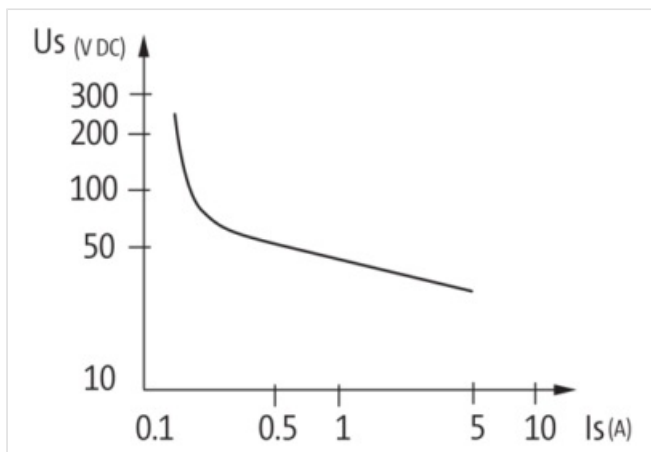
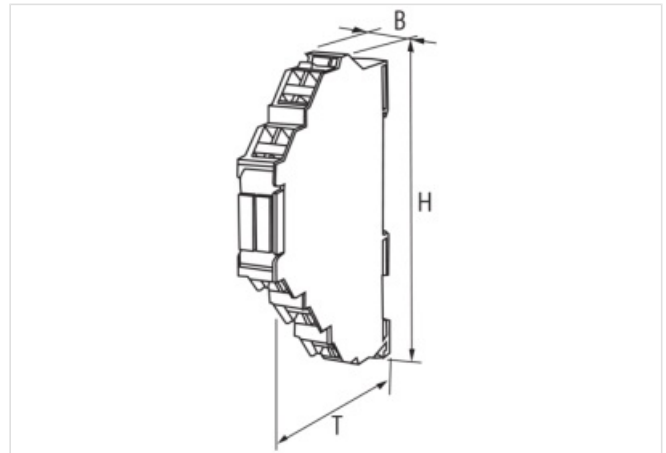
2 NO/NC contacts

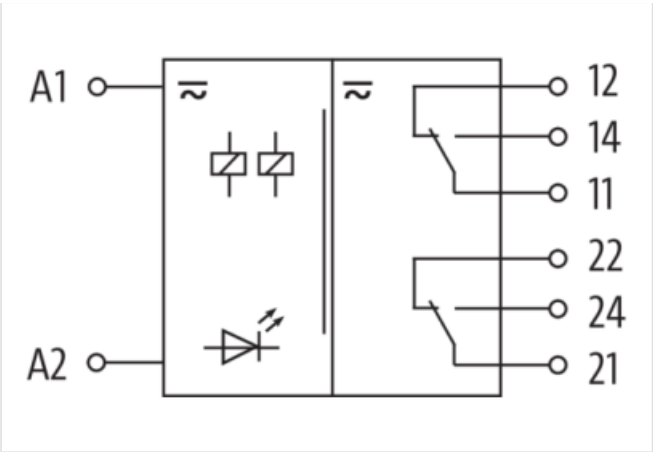
6 A

110 V AC/DC

Spring clamp terminals

safe separation (EN 60947-1)

[Link to Product](#)**Illustration**



Product may differ from Image



Commercial data	
URL Webshop	https://shop.murrelektronik.com/6652130
GTIN	4048879021999
ECLASS-6.0	27371601
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-7.1	27371601
ECLASS-8.0	27371601
ECLASS-8.1	27371601
ECLASS-9.0	27371601
ECLASS-9.1	27371601
ECLASS-10.0.1	27371601
ECLASS-10.1	27371601
ECLASS-11.0	27371601
ECLASS-11.1	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601
ECLASS-14.0	27371601
ETIM-5.0	EC001437
ETIM-6.0	EC001437
ETIM-7.0	EC001437
ETIM-8.0	EC001437
EAN	4048879021999
Electrical data Input	
Input voltage AC	110 V
Input voltage AC min.	95 V
Input voltage AC max.	121 V
Input voltage DC	110 V
Input voltage DC min.	95 V
Input voltage DC max.	121 V
Input current	7 mA
Electrical data Output	
Switching voltage AC max.	250 V

Switching voltage DC max.	250 V
Switching current max.	6 A
Switching current DC	100 mA
Switching frequency max.	10 Hz
Power rating AC max.	1,500 VA
Power rating DC max.	120 W
Utilization category AC-12 (EN IEC 60947-5-1)	6 A @ 24 V , 6 A @ 110 V , 6 A @ 230 V
Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 24 V , 3 A @ 110 V , 3 A @ 230 V
Utilization category DC-13 (EN IEC 60947-5-1)	1 A @ 24 V , 0.2 A @ 110 V , 0.1 A @ 230 V

Diagnostics

Status indication LED	green
-----------------------	-------

Device protection

Condition lifetime	load-dependent
--------------------	----------------

Device protection | Electrical

Electrical lifetime	20,000,000 Cycles
Rated surge voltage	4 kV

Device protection | Mechanical

Mechanical endurance	20,000,000 Cycles
----------------------	-------------------

Mechanical data

Response time max.	10 ms
Drop-out time max.	15 ms
Bounce time max.	1.5 ms

Mechanical data | Material data

Material contact	Ag Sn O2
------------------	----------

Mechanical data | Mounting data

Height	90 mm
Width	12.4 mm
Depth	65 mm
Mounting method	geschnappt
Suitable for mounting type	(EN 60715), mounting rail

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	50 °C

Connection type 4

Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	12
PIN 2	22
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	11
PIN 2	21
Family construction form	terminal
No. of poles	2

Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	14
PIN 2	24
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	A 1
PIN 2	A 2