




CX2033 | Embedded PC with AMD Ryzen™ V1202B

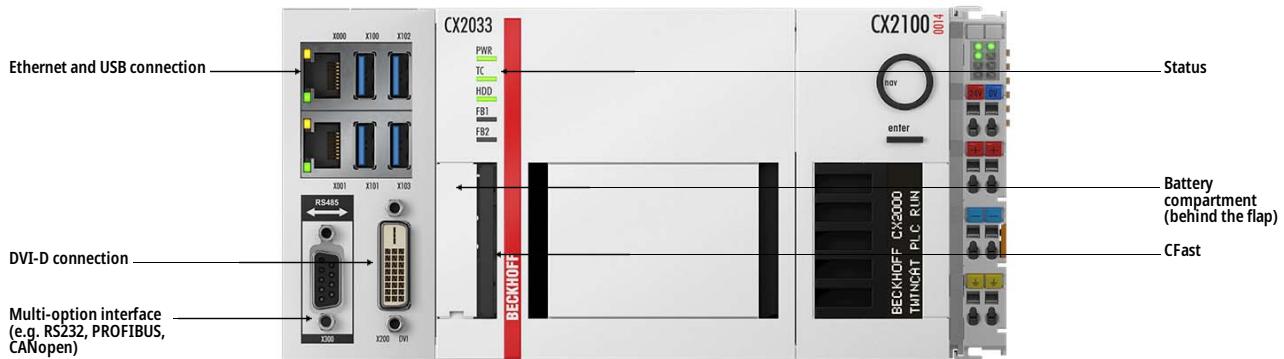

■ **Product status:** regular delivery

The CX2033 is a modularly expandable Embedded PC for DIN rail mounting and has an AMD Ryzen™ V1202B CPU with a clock speed of 2.3 GHz and two cores. The power supply unit required for operation enables the direct use and connection of all Beckhoff I/O components to this CPU module.

The TwinCAT automation software turns the CX2033 system into a high-performance PLC and motion control system that can be used with or without visualization. Both TwinCAT 2 in 32-bit mode and the latest TwinCAT 3 version in 64-bit mode are supported. Continuing support for TwinCAT 2 by the CX2033 and CX2043 guarantees investment protection for projects and systems that were or will be created with this 32-bit generation.

The devices from the CX20x3 series are characterized by outstanding real-time characteristics under the highest computing loads. This enables deterministic processing with short cycle times on the individual cores of the CPUs.

The basic equipment of the hardware includes two independent Gbit-Ethernet interfaces, four USB 3.2 Gen. 2 ports, one DVI-D interface, and a multi-option interface that can be equipped ex factory with a flexible choice of further interfaces (e.g., serial port, fieldbus, or second video connection).

The internal RAM size is 8 GB; up to 16 GB are also optionally possible. The controller boots from the CFast card and has an internal 128 kB NOVRAM for use as a persistent data memory.

The CX2033 is fanless and has no rotating components. Cooling takes place by passive thermal convection.

Other components from the CX2000 family can be connected via the multi-pin terminals on either side. Up to four modules of the type CX2500-xxxx can be connected on the left side of the basic CPU module. The connection order is irrelevant. Internally, the modules are connected via PCI Express® and can be plugged to the CPU in the field.

Modules of the type CX2550 (e.g., hard disks/SSD modules) and a power supply unit of the type CX2100-xxxx can be connected on the right. The power supply unit supplies power to the entire system of CPU module and all plugged optional

components. All Beckhoff EL and KL terminals can be connected directly to the power supply unit. A compact unit comprising controller and I/O level is thus created on the DIN rail.

The extended operating temperature range from -25°C to +60°C enables the CX2033 to be used under climatically challenging conditions.

Product information

Technical data

Technical data	CX2033
Processor	AMD Ryzen™ V1202B 2.3 GHz
Number of cores	2
Flash memory	slot for CFast card, card not included
Main memory	8 GB DDR4 RAM (expandable ex factory to 16 GB)
Interfaces	2 x RJ45 10/100/1000 Mbit/s, 1 x DVI-D, 4 x USB 3.2 Gen. 2, 1 x optional interface
Cooling	passive, optionally with active cooling ex factory
Diagnostics LED	1 x power, 1 x TC status, 1 x flash access, 2 x bus status
Clock	internal battery-backed clock for time and date (battery exchangeable)
Operating system	Windows 10 IoT Enterprise 2019 LTSC, Windows 10 IoT Enterprise 2021 LTSC, Windows 11 IoT Enterprise 2024 LTSC, TwinCAT/BSD, Beckhoff RT Linux®
Control software	TwinCAT 2 runtime TwinCAT 3 runtime (XAR)
I/O connection	via power supply module (E-bus or K-bus, automatic recognition)
Power supply	24 V DC (-15%/+20%)
UPS OCT-capable	yes (depending on power supply unit)
NOVRAM	128 kB
Max. power consumption	42 W
Weight	approx. 1165 g
Dimensions (W x H x D)	144 mm x 99 mm x 91 mm
Relative humidity	95%, no condensation
Operating temperature	-25...+60°C
Storage temperature	-40...+85°C
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protection rating	IP20
Approvals/markings	CE, UL
TwinCAT 3 platform level	Performance Plus (50); please see here for an overview of all the TwinCAT 3 platform level

Ordering information

OS = operating system options
 10 = no operating system
 16 = Windows 10 IoT Enterprise 2019 LTSC 32 bit
 17 = Windows 10 IoT Enterprise 2019 LTSC 64 bit
 18 = TwinCAT/BSD
 19 = Windows 10 IoT Enterprise 2021 LTSC 64 bit
 21 = Beckhoff RT Linux®
 22 = Windows 11 IoT Enterprise 2024 LTSC 64 Bit

T = TwinCAT software licenses
 0 = no TwinCAT
 1 = equipped with TwinCAT 2 PLC runtime
 2 = equipped with TwinCAT 2 NC PTP runtime
 3 = equipped with TwinCAT 2 NC I runtime
 5 = equipped with TwinCAT 3 runtime (XAR),
 no licenses included

CX20x3-00ST

Ordering information

CX2033-0100	CPU module, no operating system, no TwinCAT
CX2033-0160	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, no TwinCAT
CX2033-0161	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 PLC runtime
CX2033-0162	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 NC PTP runtime
CX2033-0163	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 NC I runtime
CX2033-0170	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 64 bit, no TwinCAT
CX2033-0175	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included
CX2033-0185	CPU module, TwinCAT/BSD, TwinCAT 3 runtime (XAR), no licenses included
CX2033-0190	CPU module, Microsoft Windows 10 IoT Enterprise 2021 LTSC, 64 bit, no TwinCAT
CX2033-0195	CPU module, Microsoft Windows 10 IoT Enterprise 2021 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included
CX2033-0210	CPU module, Beckhoff RT Linux®, no TwinCAT (product announcement estimated market release 1 st quarter 2026)
CX2033-0215	CPU module, Beckhoff RT Linux®, TwinCAT 3 runtime (XAR), no licenses included (product announcement estimated market release 1 st quarter 2026)
CX2033-0220	CPU module, Microsoft Windows 11 IoT Enterprise 2024 LTSC, 64 bit, no TwinCAT
CX2033-0225	CPU module, Microsoft Windows 11 IoT Enterprise 2024 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included

CX20x3-016x: only 4 GB RAM can be used with [Windows 10 IoT Enterprise 2019 LTSC](#) 32 Bit.

[TwinCAT/BSD](#) and [Beckhoff RT Linux®](#) require a CFast flash card with a minimum capacity of 20 GB.

[Windows 10 IoT Enterprise](#) requires a CFast flash card with a minimum capacity of 40 GB.

[Windows 11 IoT Enterprise](#) requires 10 GB free storage space for future security updates. Depending on the installed software, a storage media with at least 80 GB is recommended. For details see [Infosys](#).

TwinCAT 3 runtime (XAR) is preinstalled, without licenses. Please order TwinCAT 3 licenses separately from the TwinCAT 3 Price List.

Options

Options	
CX2900-0010	Operating system preequipped on 2½-inch HDD/SSD for CX20x2 and CX20x3. Requires the extension module CX2550-0020 and one 2½-inch HDD/SSD.
CX2900-0301	“Active cooling”: factory conversion of the CX2033 CPU module for active cooling in order to enable flexible installation positions (see documentation). Active cooling takes place via a fan cartridge. This option requires the use of a power supply unit type CX2100-0014 or CX2100-0914.
CX2900-0305	Memory extension to 16 GB DDR4 RAM, instead of 8 GB DDR4 RAM for CX2033 and CX2043. For the CX2033 this extension reduces the maximum permissible ambient temperature to 50°C. For operation of the CX2033 up to 60°C the active cooling CX2900-0301 is required.
C9900-B654	Specific BIOS with activated UPS OCT instead of standard BIOS. This BIOS is only usable with a CU81xx UPS module.

Optional interfaces	
CX2033-N010	DVI-D interface, additional DVI-D port for clone or extended display mode. Is not supported by TwinCAT/BSD.
CX2033-N011	DisplayPort interface, additional DisplayPort for clone or extended display mode. Is not supported by TwinCAT/BSD.
CX2033-N030	RS232 interface, D-sub plug, 9-pin
CX2033-N031	RS485 interface, D-sub socket, 9-pin, configuration as an end point, without echo, termination on
CX2033-N031-0001	RS485 interface, D-sub socket, 9-pin, configuration as an end point, with echo, termination on
CX2033-N031-0002	RS485 interface, D-sub socket, 9-pin, configuration as drop point, without echo, termination off
CX2033-N031-0003	RS485 interface, D-sub socket, 9-pin, configuration as drop point, with echo, termination off
CX2033-N031-0004	RS422 interface, D-sub socket, 9-pin, configuration as full duplex end point, termination on
CX2033-M112	2 x EtherCAT master interface
CX2033-B110	EtherCAT slave interface, EtherCAT IN and OUT (2 x RJ45)
CX2033-M310	PROFIBUS master interface, D-sub socket, 9-pin
CX2033-B310	PROFIBUS slave interface, D-sub socket, 9-pin
CX2033-M510	CANopen master interface, D-sub plug, 9-pin
CX2033-B510	CANopen slave interface, D-sub plug, 9-pin
CX2033-M930	PROFINET RT, controller interface, Ethernet (2 x RJ45 switch)
CX2033-B930	PROFINET RT, device interface, Ethernet (2 x RJ45 switched)

Accessories

Accessories	
CX2900-0026	20 GB CFast card, 3D flash, extended temperature range (only for Windows CE or TwinCAT/BSD operating systems)
CX2900-0038	40 GB CFast card, 3D flash, extended temperature range
CX2900-0040	80 GB CFast card, 3D flash, extended temperature range
CX2900-0042	160 GB CFast card, 3D flash, extended temperature range
CX2900-0044	320 GB CFast card, 3D flash, extended temperature range
CX2900-0101	Housing locking clips (black) for the CX52x0, CX53x0, CX56x0 and CX20xx series 10 locking pin sets (each set consisting of two pieces)
CX2900-0102	Cover for left-side module bus connector, 5 pieces
CX2900-0103	Spare fan cartridge for CX20xx with fan option – cartridge consisting of chassis and 60 mm fan – simple exchange in the field due to wireless installation – dimensions (W x H x D) 67 x 62 x 16 mm
<u>C9900-K530,-K552,-K553,-K554</u>	USB cable, shielded, PVC, 1 x 2 x 28AWG + 2C 20AWG, fixed installation, black, USB A, plug, straight, male, 4-pin – USB B, plug, straight, male, 4-pin
<u>C9900-K569,-K570,K577</u>	USB cable, shielded, PVC, 2 x 2 x AWG28 + 1 x 2 AWG28 + 1 x 2 x AWG24, fixed installation, black, USB A, plug, straight, male, 9-pin – USB B, plug, straight, male, 9-pin
<u>ZK1090-9191-0xxx</u>	RJ45, plug, straight, male, 8-pin – RJ45, plug, straight, male, 8-pin
<u>ZK1093-9191-0xxx</u>	RJ45, plug, straight, male, 8-pin – RJ45, plug, straight, male, 8-pin
<u>C9900-K527,-K549,-K550,-K568</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 18 + 1-pin – DVI-D, plug, straight, male, 18 + 1-pin
<u>C9900-K528,-K529,-K534...K537,-K688</u>	Display cable, shielded, PVC, 14 x AWG24, fixed installation, black, DVI-D, plug, straight, male, 18 + 1-pin – DVI-D, plug, straight, male, 18 + 1-pin
<u>C9900-K780...K783, -K820</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 24 + 1-pin – DisplayPort, plug, straight, male, 20-pin
<u>C9900-K543,-K544,-K507,-K555,-K651</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 24 + 1-pin – M16, plug, straight, female, 19-pin